

mounted reversible ploughs



Light Robust

Light, Robust, Easy to handle



Kverneland 150 B/S Variomat

Light and robust mounted reversible ploughs for tractors up to 150 hp.


Spring leaf auto-reset system (S version) or shearBolt (B version). High performance in various soils & surface conditions.

- · Low lift requirements, easy to pull, low fuel consumption
- Easy furrow width adjustments : Variomat
- Simple to adjust and to operate

Kverneland Variomat

- for Optimal match between tractor, implement and soil conditions.
- Increases capacity by more than 40% (12-20").
- Cost efficient: when output increases by 40%, fuel consumption/ha reduces significantly.
- Easier to work straight and close to obstacles like fences...
- Smart working width adjustments from tractor seat (optional memory system)
- Self adjusting pulling line.

Easy setting adjustments

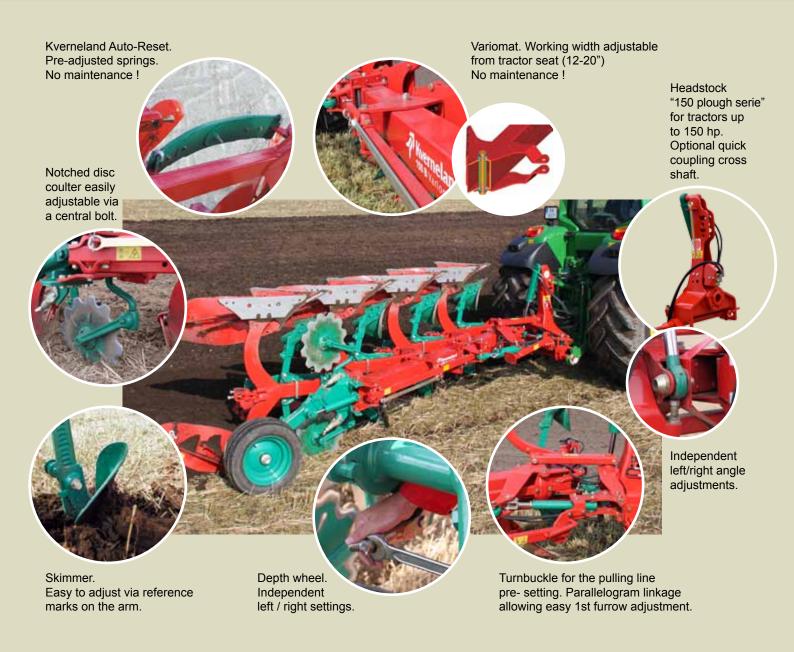

Kverneland

Even more strength



KVERNELAND TECHNOLOGY:

- Unique Design and Heat treatments to the complete plough
- Best light weight/robustness ratio
- Unsurpassed quality and wear resistance
- 130 years of experience in steel technology!









Headstock "150 plough serie"

"One piece concept". Robust heat treated 110 mm Ø hollow main shaft. Designed for maximum strength and optimum hose lay out. Cross shaft cat. II or III with option quick coupling.

Kverneland Steel Heat Treatment Technology applies to the complete plough!

Protections: auto-reset or shearbolt

Well proven Kverneland leaf spring auto-reset system. Unique system that withstands the toughest forces and guarantees a longer life to the plough and tractor. Optimum ploughing performance: each body releases independently.

No maintenance!

Heat treated shearbolts protect the heat treated beams (3400 kp)

Frame 150x150 mm

Extendable frame by one furrow (max 4-5 furrow ploughs)

Robust induction heat treated frame to the same exacting standards as all kverneland ploughs!



Adapts to difficult working conditions



Technical Specifications

	150 S Variomat		150 B Variomat		
Number of furrows	3	4	3	4	5
Headstock (max. hp)	150		150		
ø mm axle of headstock	110		110		
Main frame mm	150x150x6,3		150x150x6,3		
Interbody clearance	85/100		85/100		
Working width (85/100 cm interbody clearance)	12-20"		12-20"		
Underbeam clearance cm	70 or 75		80		
Weight kg	1050	1275	890	1120	1235
Protection	Auto-Reset		Shearbolt 3.400 kp		
Min./Max. hp	85/150	105/150	75/150	95/150	115/150

Light
Robust
Easy to handle

Accessories



Optional hydraulics with memory system



Maize or manure skimmers.

Notched disc or plain disc Ø 18" / 20"





Depth wheel, frame or rear mounted to suit customer requirement.

Available sizes: 6,00 x 9,00 200 x 14,5 320/60 -12 TT 500 x 165 (steel)







Kverneland Group

Kverneland group is a leading international company, developing, producing, and distributing agricultural machinery and services. Strong focus on innovation allows us to provide a unique and broad product range with high quality.



High Performance and Reliability

To advise you, to inform you, to ensure an efficient after sale service is the everyday work of our dealers and of ourselves. We believe that these are our responsibilities. Your satisfaction is our first priority.



Watch us on YouTube Tube www.youtube.com/kvernelandgrp



Like us on facebook www.facebook.com/KvernelandGroup www.facebook.com/iMFarming



Follow us on Twitter #KvernelandGroup #iM_Farming

Kverneland Group UK Ltd.

Walkers Lane, Lea Green, St. Helens Merseyside, WA9 4AF Phone + 44 1744 8532 00 kverneland@kvernelandgroup.com

www.kverneland.com

Kverneland Group Ireland Ltd.

Hebron Industrial Estate Kilkenny, Ireland Phone + 353 56 51597 contact@kvernelandgroup.com

