



NEW HOLLAND T4000F/N/V

T4020 | T4030 | T4040 | T4050 | T4060



FIAT
INDUSTRIAL

STYLISH NEW T4000F/N/V. GREAT LOOKS, BRILLIANT



Offered in three widths to suit a range of specialist applications, the T4000F/N/V tractor series match high power to weight ratios to best in class manoeuvrability. Key features include power outputs of 65, 78, 88, 97 and 106hp(CV), a wide transmission offering, cab or ROPS and a choice of front axles.



POWERFUL AND COMPACT

Powered by all-new four-cylinder engines and with the addition of the flagship T4060 model producing 106hp(CV), the T4000F/N/V tractor series offers unrivalled performance in a compact package.



SPECIALIST VERSATILITY

Few specialist tractors can match the all-round versatility of a T4000F/N tractor. Available with tight turning SuperSteer, with automatic 4WD, these tractors can be used in a wide range of applications.



PRODUCTIVE COMFORT

Available with an advanced, fully sealed, level 2 Blue Cab, T4000F/N/V tractors match unrivalled comfort in the most unforgiving environments with brilliant all-round visibility.






ENGINEERED TO REDUCE COSTS

Long engine service intervals and low fuel consumption reduce the whole life operating costs of all T4000F/N/V models.




PERFORMANCE.






T4000V*



T4000N**



T4000F***



Rear Tyres * 280/85R28 ** 320/85R24 *** 340/85R28

CLEAN, FOUR-CYLINDER INTERCOOLED EFFICIENCY




COMPACT FOUR-CYLINDER POWER

With torque as high as 425Nm and torque reserves of up to 46%, T4000F/N/V tractors bring massive performance to a compact tractor package. Developed by FPT Industrial, the Tier 3 power units are smooth running, fuel efficient and quiet. Proven in existing T5000 and T6000 tractors, these engines have long service intervals to minimise operating costs.




INTERCOOLED EFFICIENCY

By cooling the engine intake air, the intercooler fitted to the T4000F/N/V power units boosts combustion efficiency. This is of particular benefit in high ambient temperatures, overall fuel use and power development remaining consistent, regardless of conditions.

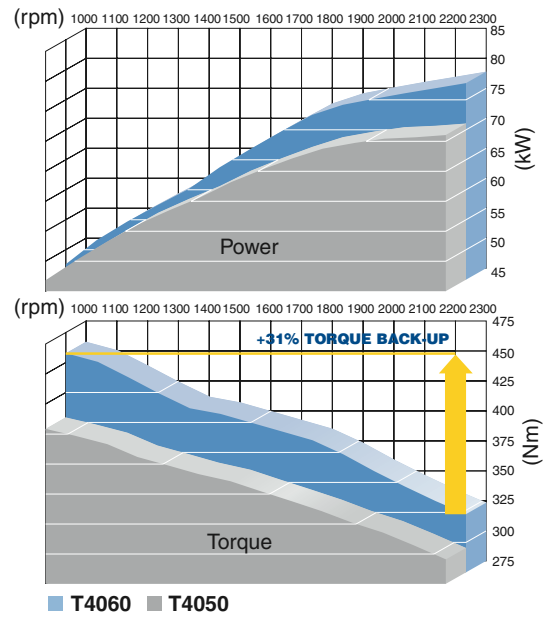

MORE POWER AND TORQUE

All T4000F/N/V models develop more power and greater torque at a lower engine speed when compared to the previous speciality series. The new range topping T4060 tractor achieves an optimum fuel consumption figure of just 221g/kWh.

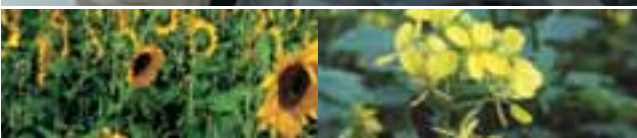







ENGINEERED FOR 100% BIODIESEL



All T4000F/N/V are designed to operate on biodiesel fuels without costly modifications. Talk to your New Holland dealer for full details.

A WIDE CHOICE OF EFFICIENT TRANSMISSIONS

Thanks to the modular build of T4000F/N/V tractors, the transmissions can be easily matched to end user needs. Advanced features include powershuttle, power clutch, park lock and creep speed options. To cope with the extra power of the new T4060, a heavier duty clutch and stronger rear PTO driveline components are used.

TRANSMISSION CHOICE

-  **16x16** Shuttle Command™ (30kph / 40kph)
-  **32x16** Split Command™ (30kph / 40kph)
-  **32x16** Dual Command™ (30kph / 40kph)
-  **28x16** Shuttle Command™ (optional Creeper / 30kph / 40kph)
-  **16x16** Powershuttle (30kph / 40kph)
-  **44x16** Dual Command™ (optional creeper / 30kph / 40kph)

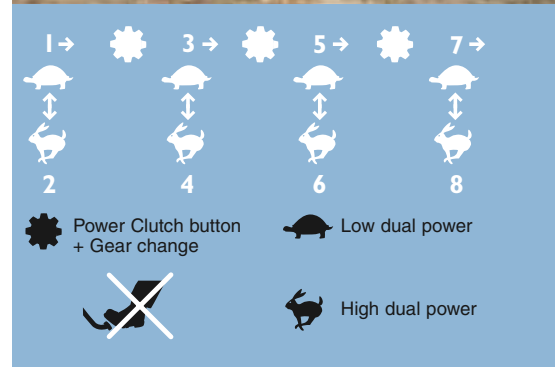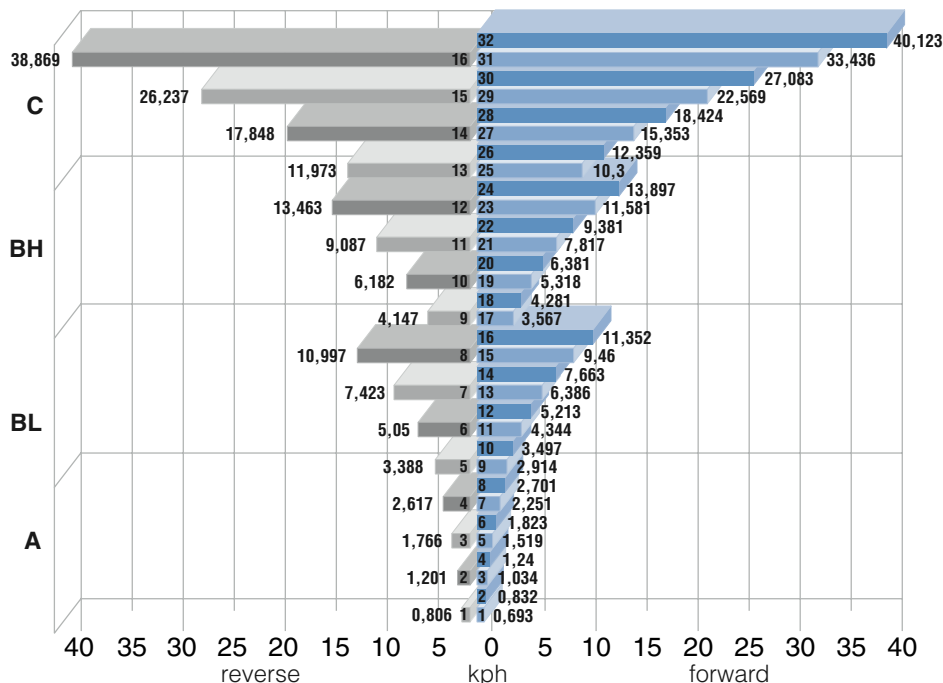

DUAL COMMAND™ OFFERS SO MUCH MORE

The 32x16 Dual Command™ transmission with powershuttle offers the same number of ratios as Split Command, but allows a high low push button ratio 'split' to be made under full load and without using the clutch. A 44x16 Dual Command transmission is available to meet specialist requirements.

POWER CLUTCH

Dual command transmissions are available with a Power Clutch option. This allows the operator to use a push button on the main shift lever to operate the clutch. This makes changes on the move fast, smooth and comfortable.

NEW PARK LOCK SYSTEM

The new Park Lock system available on Dual-Command tractors, ensures additional safety when parking on slopes by mechanically locking the transmission from a lever inside the cab.

Power Clutch button



CREEP SPEED OPTION

Creep speeds as low as 160 metres/hour are available, enabling the tractor to carry out a wide range of precision operations. These transmissions are so flexible that this same low speed can be matched to a ratio offering a 40kph transport speed.



SHUTTLE COMMAND™ AND SPLIT COMMAND™ TRANSMISSIONS

Entry level 16x16 Shuttle Command can be specified with a 28x16 creep speed option to deliver working speeds as low as 0.2kph. The 32x16 Split Command is similar to Dual Command but uses the clutch pedal to affect a ratio 'split' for a 20% reduction in forward speed. A mechanical shuttle is fitted to both transmissions.

POWERSHUTTLE SPEED DIRECTION CHANGE

If a fast shuttle between forward and reverse is a priority, consider the 16x16 Powershuttle transmission. The operator can simply use the electro-hydraulic shuttle lever to change direction. From neutral, the shuttle lever can be used to smoothly feed power to the transmission without using the clutch.



SMALL IN SIZE, BIG IN COMFORT

DESIGNED AROUND THE OPERATOR

Operator comfort is a key New Holland priority. State of the art virtual simulation technology is employed to achieve the most ergonomic layout of the cab controls. This has resulted in an all new right hand console design, grouping all main hydraulic levers together for ease of operation. Noise and vibration levels are tightly controlled, with light steering and class leading visibility over the stylish engine hood. All this contributing to reduced operator fatigue.



BIGGER, BETTER FOOTWELLS

On the smaller V/N models the footwells have been redesigned to offer much more space for the operator's feet. This attention to detail ensures a much more comfortable driving position for the operator.

BLUE CAB FOR HARSH ENVIRONMENTS

The sealed Blue Cab option has thermostatically controlled air conditioning developed to suit harsh environments. Anti-pollen and recirculation filters remove dust and pollutants. The ventilation system draws in 20% more air than the standard cab.





ERGONOMIC EXCELLENCE

The optional multi-function, electronic joystick allows the operator to control eight outlets at one time. Switches on the console dictate which mid-mounted valves are to be used. The hydraulic motor operates through two additional outlets, activated by a switch on the console. It also features a Lock position for additional safety.



ALL THE INFORMATION YOU NEED

The new instrument display fitted to all T4000F/N/V tractors is easy to read and understand. The new display lists valuable information including forward speed, PTO speed, low fuel and the next service interval.



HIGH COMFORT SEAT

Fitted with a deep cushion seat pan and wide backrest, the seat in T4000F/V/N tractors adjusts to suit all sizes of operator. A choice of mechanical or deluxe air suspension seats are available.



LOW CAB ROOF AND FOLDING ROPS

Both standard and Blue Cab models have a newly developed low profile to reduce the overall height of the tractor. ROPS models have a forward folding frame to clear over-hanging crops or access low buildings. The new folding beacon design allows a quick and easy transition when necessary.



SPECIALIST TRACTORS FOR SPECIALIST NEEDS




The modular build of T4000F/N/V tractors enables New Holland to offer a broad range of specifications that exactly matches your specialised need. The standard hydraulic flow of all models is 48.6Lpm. Need more flow? Specify the Megaflow pump, and output can be increased to 63.8Lpm.

T4000F/N/V. Factory built to your specification.


DIRECT OUTPUT, LOWER FUEL CONSUMPTION

Engaged via a servo-assisted control, the rear pto on T4000F/N/V tractors has a direct driveline to minimise power loss. Maximum engine power is directed to the PTO for optimum efficiency and performance. Improvements to the driveline have resulted in reduced engine RPM at 540 and 1000rpm PTO speeds, thereby reducing fuel consumption and noise. Thanks to this innovative design, fuel savings of 5% can be achieved. A choice of Ground Speed/540/540E/1000 PTO speeds are available.

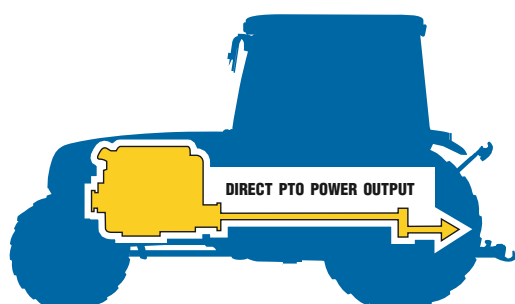

HYDRAULIC LINKAGE SETTINGS

Hydraulic stabilisers can be specified to allow the attachment to be offset to either side of the tractor. The stabilisers can be set in a fixed or float position by the push of a button. A levelling ram can also be specified for the right lower link arm. Both systems have a dedicated hydraulic supply.

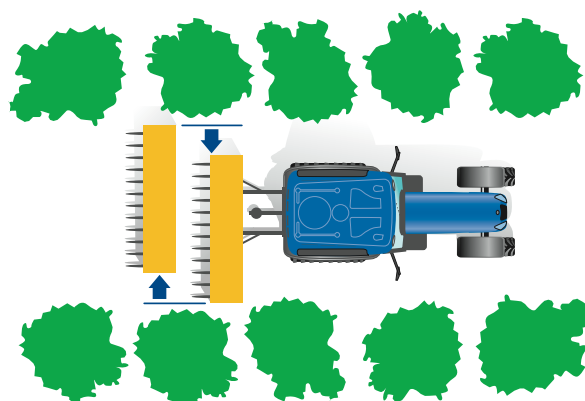

ADVANCED ELECTRONIC DRAFT CONTROL FOR OPTIMUM PERFORMANCE

Simple to use, EDC allows the operator to precisely set up and control implement working depths, lift height and lowering speeds. Other features include a finger tip controlled fast raise and lower switch to reduce the number of operations needed during an end of row turn.

MECHANICAL HYDRAULICS WITH LIFT-O-MATIC

The mechanical hydraulic system features proven Flexion Bar™ lower link draft sensing. This offers excellent weight transfer performance and easily adjusted sensitivity. Lift-O-Matic is standard and enables an implement to be raised and lowered to its previous setting using a single control. Also, a mechanical lift height control limiter ensures accurate implement lift height setting which eliminates the risk of damaging PTO shafts.



REMOTES TO POWER SPECIALIST ATTACHMENTS

Modern attachments can require three or more remote valves. With T4000, this is not a problem. Up to three remotes, plus two push button controlled flow dividers, allow up to ten outlets to be specified. A redesigned mid mounted valve block has allowed eight hydraulic outlets, operated by electro hydraulic valves, to be fitted*. There is also a switch-activated, 20l/min hydraulic motor incorporated into the design. Oil flow rate can be adjusted as required by using a simple electrical control valve.

*Cab only

VERSATILE LINKAGE WITH HIGH CAPACITY

For maximum versatility, the rear linkage is adjustable to match Cat I or Cat II implements. All T4000 F/V/N models offer high lift capacities of up to 2600kg on the T4000F models. Quick-attach couplings are standard with remote linkage controls to speed the fitting and removal of attachments.






UNIQUE NEW HOLLAND FEATURES FOR PRODUCTIVITY AND SAFETY

SuperSteer™ front axles with Auto 4WD management and dedicated front hitch are unique to New Holland. Offering an effective steering angle of 76°, tractor with a SuperSteer™ front axle can offer a turn radius as low as 2.9m for truly outstanding agility. The way in which the axle moves as the steering lock is increased helps to reduce front wheel scrub.


SUPERSTEER OFFERS SO MUCH MORE

With SuperSteer you get so much more than just a tight, clean turn. Front mounted equipment turns into work sooner and the increased wheelbase transfers more weight to the front of the tractor. This decreases the need for front ballast when working with heavy rear mounted implements.

SAVE TIME AND MONEY

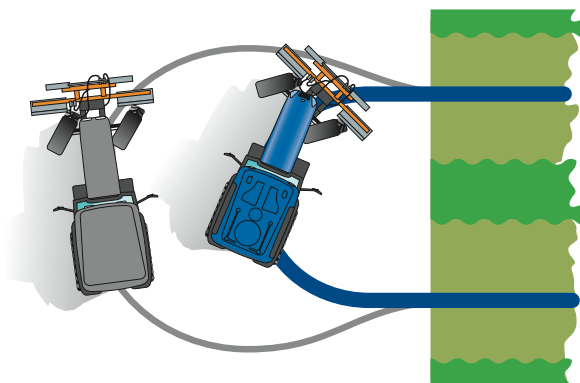

IMPROVED STABILITY

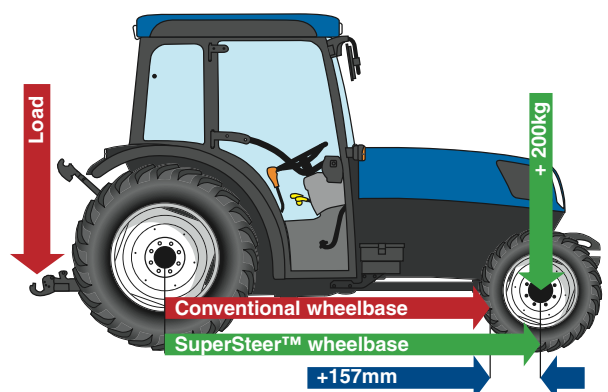

THE RIGHT FRONT AXLE FOR YOUR NEEDS

All T4000V/N/F tractors can be specified with a choice of 2WD or 4WD front axles. T4000N/F are also available with a tight turning 4WD SuperSteer™ front axle. The turn radius of the 2WD drive T4000F/N/V tractors can be as low as 2.8m. The 2WD specification is available on both ROPS and cab models.



VERSATILE SUPERSTEER FRONT LINKAGE AND PTO


All T4000F models can be specified with an axle mounted Cat I/II front linkage with quick attach couplings and 1000rpm PTO. Fully integrated into the main hydraulic controls, the front linkage can be easily and precisely controlled. Remote exterior switches make coupling attachments safe, fast and simple.



ADVANCED TRACTION MANAGEMENT

The acclaimed and proven New Holland automatic 4WD system is now available on all T4000F/N/V models. The system engages drive to the front wheels if rear wheel slip exceeds 5%* and on slopes of 10 deg plus*. For stability and safety, 4WD is also engaged when both brake pedal are pressed. The front and rear differentials are engaged and released by a dash mounted switch.

*Only T4000F/N models

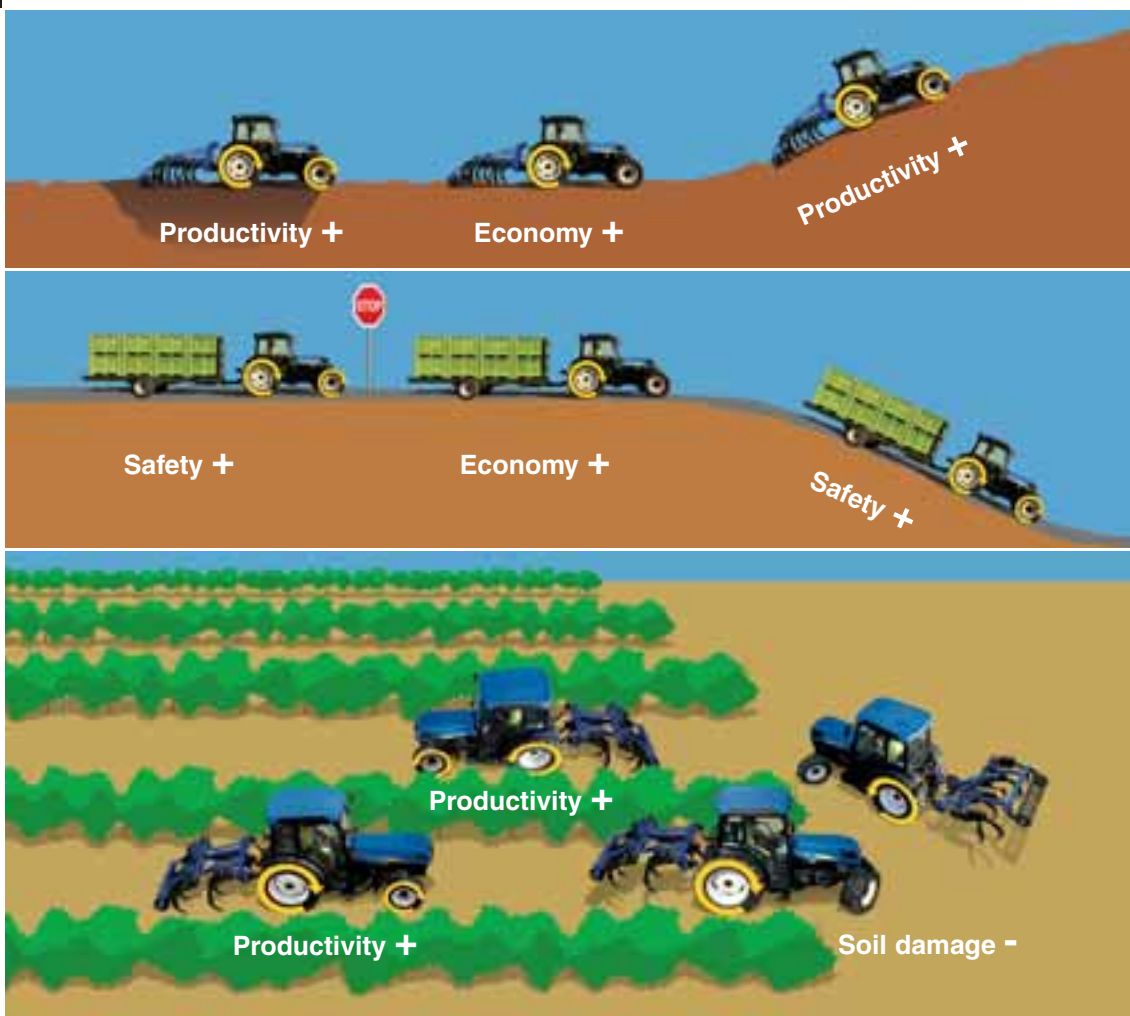

MODELS

T4020V

T4030V | N | F

T4040V | N | F

T4050V | N | F

T4060V | N | F

New Holland Engine*	F5C	F5C	F5C	NEF	NEF
No. of cylinders / Capacity / Valves / Emissions Level	4 / 3200 / 2 / Tier 3	4 / 3200 / 2 / Tier 3	4 / 3200 / 2 / Tier 3	4 / 4500 / 2 / Tier 3	4 / 4500 / 2 / Tier 3
Aspiration	Turbocharged	Turbocharged	Turbocharged	Turbocharged	Turbocharged
Intercooler	●	●	●	●	●
Approved biodiesel Blend	B100**	B100**	B100**	B100**	B100**
Rated Engine Power ISO TR14396 - ECE R120 [kW/hp(CV)]	48/65	57/78	65/88	71/97	78/106
Rated Engine Speed (rpm)	2300	2300	2300	2300	2300
Max. Torque ISO TR14396 (Nm)	290@1250rpm	330@1250rpm	352@1250rpm	398@1300rpm	425@1300rpm
Torque reserve (%)	46	39	30	35	31
Horizontal Exhaust	●	●	●	●	●
Vertical exhaust (Cab only)	○	○	○	○	○
Internal EGR	●	●	●	●	●
Cooling method	Liquid	Liquid	Liquid	Liquid	Liquid
Optimum fuel Consumption (g/kWh)	219	218	219	216	221
Fuel tank capacity standard front axle (L)	67/77	67/77 67/77 –	67/77 67/77 –	67/77 67/77 –	67/77 67/77 –
Fuel Tank capacity SuperSteer™ front axle (L)	–	– 47/57 47/78	– 47/57 47/78	– 47/57 47/78	– 47/57 47/78
Service Interval (hrs)	500	500	500	600	600
Transmission					
Electro hydraulic diff. lock	●	●	●	●	●
Mechanical diff. lock	–	– – ○	– – ○	– – ○	– – ○
Suspended pedals	●	●	●	●	●
Oil immersed braking system	●	●	●	●	●
16 x 16 Shuttle Command™ (30kph / 40kph)	●	●	●	●	●
Minimum speed (Without Creeper) (km/h)	0.7	0.7	0.7	0.7	0.7
28 x 16 Shuttle Command™ [Optional Creeper (30kph / 40kph)]	○	○	○	○	○
Minimum speed (With Creeper) (km/h)	0.17	0.17	0.17	0.17	0.17
32 x 16 Spilt Command™ (30kph / 40kph)	○	○	○	○	○
Minimum speed (Without Creeper) (km/h)	0.7	0.7	0.7	0.7	0.7
16 x 16 Powershuttle (30kph / 40kph)	○	○	○	○	○
Minimum speed (Without Creeper) (km/h)	0.7	0.7	0.7	0.7	0.7
32 x 16 Dual Command™ (30kph / 40kph) and parking lock	○	○	○	○	○
Minimum speed (Without Creeper) (km/h)	0.7	0.7	0.7	0.7	0.7
44 x 16 Dual Command™ [Opt. Creeper (30kph / 40kph)] and parking lock	○	○	○	○	○
Minimum speed (With Creeper) (km/h)	0.17	0.17	0.17	0.17	0.17
Power Clutch (Dual Command™ transmission only)	○	○	○	○	○
Front axle					
2WD front axles	○	○	○	○	–
4WD front axles	●	● ○ –	● ○ –	● ○ –	● ○ –
SuperSteer™ 4WD front axle	–	– ● ●	– ● ●	– ● ●	– ● ●
Auto 4WD Standard / SuperSteer	● / –	● / – ● / ● – / ●	● / – ● / ● – / ●	● / – ● / ● – / ●	● / – ● / ● – / ●
Steering angle 2WD front axle (°)	57	57 65 55	57 65 55	57 65 55	57 65 55
Steering angle 4WD front axle (°)	55	55 55 –	55 55 –	55 55 –	55 55 –
Steering angle SuperSteer front axle (°)	–	– 71 76	– 71 76	– 71 76	– 71 76
Turn radius 2WD front axle (mm)	3000	3000 2800 3100	3000 2800 3100	3000 2800 3100	3000 2800 3100
Turn radius 4WD front axle (mm)	3400	3400 3400 –	3400 3400 –	3400 3440 –	3400 3440 –
Turn radius SuperSteer front axle (mm)	–	– 2960 2900	– 2960 2900	– 3050 2980	– 3050 2980
Dynamic fenders	–	– ○ ○	– ○ ○	– ○ ○	– ○ ○
Electro hydraulic diff. lock	●	●	●	●	●
Independent steering pump (28Lpm or 35.6Lpm Megaflow pump)	●	●	●	●	●
Front braking system	○	○	○	○	○
Axle oscillation (°)	8	8	8	8	8
Hydraulic system					
Standard pump flow (Lpm)	48.6	48.6	48.6	48.6	48.6
Optional MegaFlow™ pump flow (Lpm)	63.8	63.8	63.8	63.8	63.8
Mechanical draft control (MDC)	●	●	●	●	●
Lower link draft sensing	●	●	●	●	●
Lift-O-Matic™ system	●	●	●	●	●
Electronic draft control (EDC)	○	○	○	○	○
Cont. lift capacity through the range (610mm behind the ball bar ends)(kg)	1835	1835	1835	1835	1835
Max. lift capacity at ball ends with arms horizontal (kg)	2600	2600	2600	2600	2600
Rear Linkage category	I & II	I & II	I & II	I & II	I & II
Rear fender mounted Linkage controls (EDC only)	○	○	○	○	○
Width adjustable link ends	○	○	○	○	○
Hydraulically adjustable right hand lift rod adjustment and sway restriction	○	○	○	○	○
Max. no. remote outlets (Rear/Mid)	10/8+2motor	10/8+2motor	10/8+2motor	10/8+2motor	10/8+2motor
Flow control	○	○	○	○	○
Electrohydraulic mid mount valve with proportional joystick (only cab)	○	○	○	○	○
Five mid-mount outlets (only rops)	○	○	○	○	○
SuperSteer™ front lift & PTO (mechanically or electronically engaged)	–	– ○ ○	– ○ ○	– ○ ○	– ○ ○
Max. front linkage lift capacity at ball ends (kg)	–	– 1275 1275	– 1275 1275	– 1275 1275	– 1275 1275

MODELS

T4020V

T4030V | N | F

T4040V | N | F

T4050V | N | F

T4060V | N | F

PTO														
Servo-assisted engagement		●	●	●	●	●	●	●	●	●	●	●	●	●
Ground speed		○	○	○	○	○	○	○	○	○	○	○	○	○
540		●	●	●	●	●	●	●	●	●	●	●	●	●
540 / 540E		○	○	○	○	○	○	○	○	○	○	○	○	○
540 / 540E / 1000		○	○	○	○	○	○	○	○	○	○	○	○	○
Operator environment														
Rubber isolation blocks		●	●	●	●	●	●	●	●	●	●	●	●	●
Lateral levers		●	●	●	●	●	●	●	●	●	●	●	●	●
Suspended platform (with mid mounted foldable ROPS)		●	●	●	●	●	●	●	●	●	●	●	●	●
Electronic instrumentation		●	●	●	●	●	●	●	●	●	●	●	●	●
Cab with FOPS		○	○	○	○	○	○	○	○	○	○	○	○	○
Cab category level - EN 15695		1	1	1	1	1	1	1	1	1	1	1	1	1
Air conditioning		○	○	○	○	○	○	○	○	○	○	○	○	○
Blue Cab with FOPS		○	○	○	○	○	○	○	○	○	○	○	○	○
Blue Cab category level - EN 15695		2	2	2	2	2	2	2	2	2	2	2	2	2
Dimensions & Weights***														
A Wheelbase 2WD	(mm)	2078	2078	2082	2082	2078	2082	2082	2165	2169	2169	2165	2169	2169
A Wheelbase 4WD	(mm)	2093	2093	—	—	2093	—	—	2180	—	—	2180	—	—
A Wheelbase SuperSteer™ 4WD front axle	(mm)	—	—	2348	2348	—	2348	2348	—	2435	2435	—	2435	2435
B Overall length 4WD	(mm)	3925	3925	3914	3914	3925	3914	3914	4012	4001	4001	4012	4001	4001
C Minimum overall width	(mm)	1061	1061	1229	1476	1061	1229	1476	1061	1229	1476	1061	1229	1476
D Height to top of ROPS	(mm)	2249	2249	2274	2274	2249	2274	2274	2335	2360	2274	2335	2360	2274
D Height to top of cab	(mm)	2148	2148	2173	2173	2148	2173	2173	2148	2173	2173	2148	2173	2173
E Height at centre rear axle to top of cab	(mm)	1648	1648	—	—	1648	—	—	1648	—	—	1648	—	—
F Ground clearance min	(mm)	270	270	290	323	270	290	323	270	290	323	270	290	323
G T4000V front wheel track setting 2WD	(mm)	878 - 978	878 - 978	—	—	878 - 978	—	—	878 - 978	—	—	878 - 978	—	—
G T4000N front wheel track setting 2WD	(mm)	—	—	1016 - 1116	—	1016 - 1116	—	—	1016 - 1116	—	—	1016 - 1116	—	—
G T4000F front wheel track setting 2WD	(mm)	—	—	1146 - 1546	—	1146 - 1546	—	—	1190 - 1492	—	—	1190 - 1492	—	—
G T4000V front wheel track setting 4WD	(mm)	879 - 985	879 - 985	—	—	879 - 985	—	—	879 - 985	—	—	879 - 985	—	—
G T4000N front wheel track setting 4WD	(mm)	—	—	1075 - 1251	—	1075 - 1251	—	—	1075 - 1251	—	—	1075 - 1251	—	—
G T4000F front wheel track setting 4WD	(mm)	—	—	1062 - 1492	—	1062 - 1492	—	—	1190 - 1492	—	—	1190 - 1492	—	—
G T4000V rear wheel track setting 4WD	(mm)	861 - 1261	861 - 1261	—	—	861 - 1261	—	—	861 - 1261	—	—	861 - 1261	—	—
G T4000N rear wheel track setting 4WD	(mm)	—	—	1003 - 1273	—	1003 - 1273	—	—	1003 - 1273	—	—	1003 - 1273	—	—
G T4000F rear wheel track setting 4WD	(mm)	—	—	1130 - 1530	—	1130 - 1530	—	—	1130 - 1530	—	—	1130 - 1530	—	—
T4000V Weights**** 2WD/4WD	(kg)	2459/2710	2459/2710	—	—	2459/2710	—	—	2531/2790	—	—	2531/2790	—	—
T4000N Weights**** 2WD/4WD	(kg)	—	—	2546/2762	—	2546/2762	—	—	2618/2852	—	—	2618/2852	—	—
T4000F Weights**** 2WD/4WD	(kg)	—	—	2840/2910	—	2840/2910	—	—	2930/3000	—	—	2930/3000	—	—
Max. permissible weight	(kg)	3800	3800	4000	4300	3800	4000	4300	3800	4000	4300	3800	4000	4300

*Developed by FPT Industrial **Conditions apply ***Rear Tyres T4000 F = 340/85R28, T4000N = 320/85R24, T4000V 280/85R28 ****With driver (85kg) and full fuel tank

● Standard ○ Optional – Not available



NEW HOLLAND TOP SERVICE: CUSTOMER SUPPORT AND CUSTOMER INFORMATION



TOP AVAILABILITY.

If you need information, or have an out of hours question, ring our toll-free number*. All day, every day, we are just a call away.

TOP SPEED.

Express parts delivery: when you need it, where you need it!

TOP PRIORITY.

Fast-track solution during the season: because your harvest can't wait!

TOP SATISFACTION.

We drive and track the solution you need, keeping you informed: until you are 100% satisfied!

**TOP SERVICE**
00800 64 111 111

* Calls to the Top Service team are free from landlines in the United Kingdom and Republic of Ireland. UK-based mobile calls are also free, but Republic of Ireland mobile users should call **01 2421881** and this will be charged at your standard network rate.

For more details, ask your New Holland dealer!



YOUR SUCCESS - OUR SPECIALTY

AT YOUR OWN DEALER

Visit our web site for UK: www.newholland.com/uk - for ROI: www.newholland.com/ie

The data indicated in this folder are approximate. The models described here can be subjected to modifications without any notice by the manufacturer. The drawings and photos may refer to equipment that is either optional or intended for other countries. Please apply to our Sales Network for any further information. Published by New Holland Brand Communications. Bts Adv. - Printed in Italy - 03/12 - TP01 - (Turin) - **110012/INB**